


# Wilkinson Power Divider

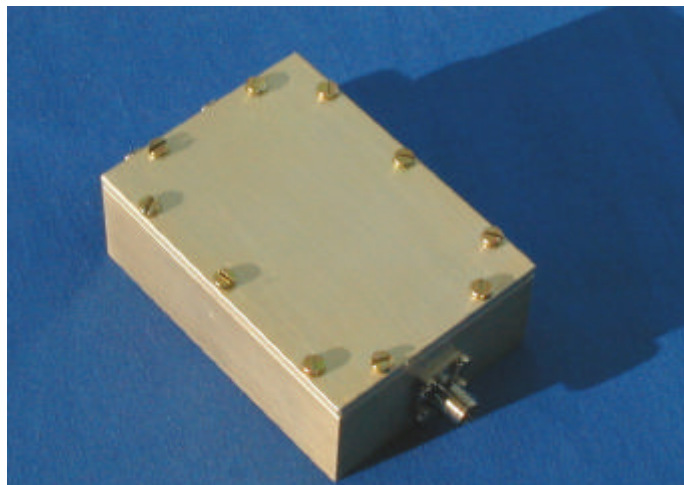

To be used for combining or dividing signals in the UHF frequency range.  
This unit can be used in combination with 4way unit to form multi channel systems.

## SPECIFICATIONS For Wilkinson 2Way combiner/divider

Model No.:	2028	
Number of inputs:	2	
Frequency range:	500 - 2500MHz	
Insertion loss total:	< -4 dB	
Power Rating each input:	2 Watts	
SWR input/output (50 $\Omega$ ):	<1.5:1, -14dB	
Isolation	-Input to input:	>20dB
Connectors:	-RF input/output	SMA Female
Dimensions:	-With:	50mm
	-Length:	110mm incl. connectors
	-Height:	25mm
Temperature	-Operating	0 to 60°C
	-Storage	-20 to 90°C

21.10.2004

Comm-connect reserve the rights to amend prices and specifications without prior notice.

**COMM-connect**  
**Sigerslevoestervej 11**  
**DK-3600 Frederikssund**  
**Denmark**

**Phone: +45 48 28 82 82**

**Fax.: +45 48 28 82 66**

**E-mail: [sales@comm-connect.com](mailto:sales@comm-connect.com)**

**WEB: <http://www.comm-connect.com>**

