


## 2-to-1 E-TETRA Combiner

Type 2043


The COMM-connect 2-to-1 TETRA combiner allows for two stations to utilize one antenna. The combiner is equipped with BNC female connectors, which makes it very easy to install in any type of installation. Mechanical mounting is made easy by mounting flaps protruding the casing.

### 2-to-1 TETRA Combiner, Type 2043, Specifications:


Frequency range:	360 MHz to 440 MHz
Insertion Loss total:	< -3.5 dB
Isolation, input to input:	> 30 dB
Power rating, each input:	10 Watts
Impedance:	50 Ω
Number of inputs:	2
SWR input/output:	<1.2:1, -20 dB
Temperature range:	-20 to 60°C
Connector:	BNC Female
Size incl. connectors:	144 x 60 x 30mm
Weight:	approx. 280 grams

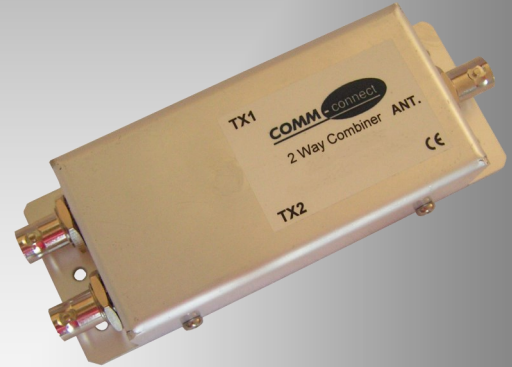

Insertion loss, Port 1 to Output:

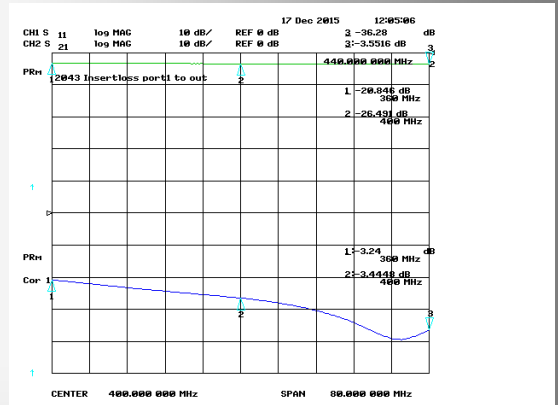

Isolation, Port 1 to Port 2:

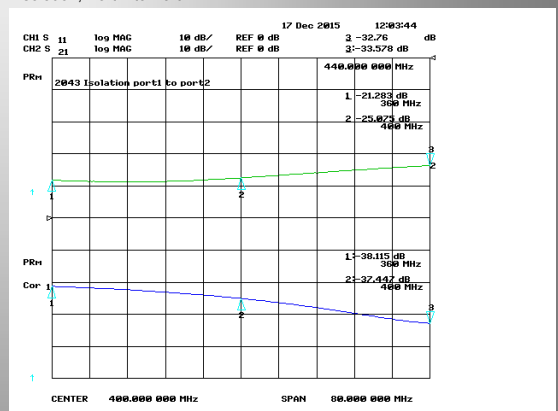

COMM-connect A/S reserves the right to change prices and specifications without prior notice